
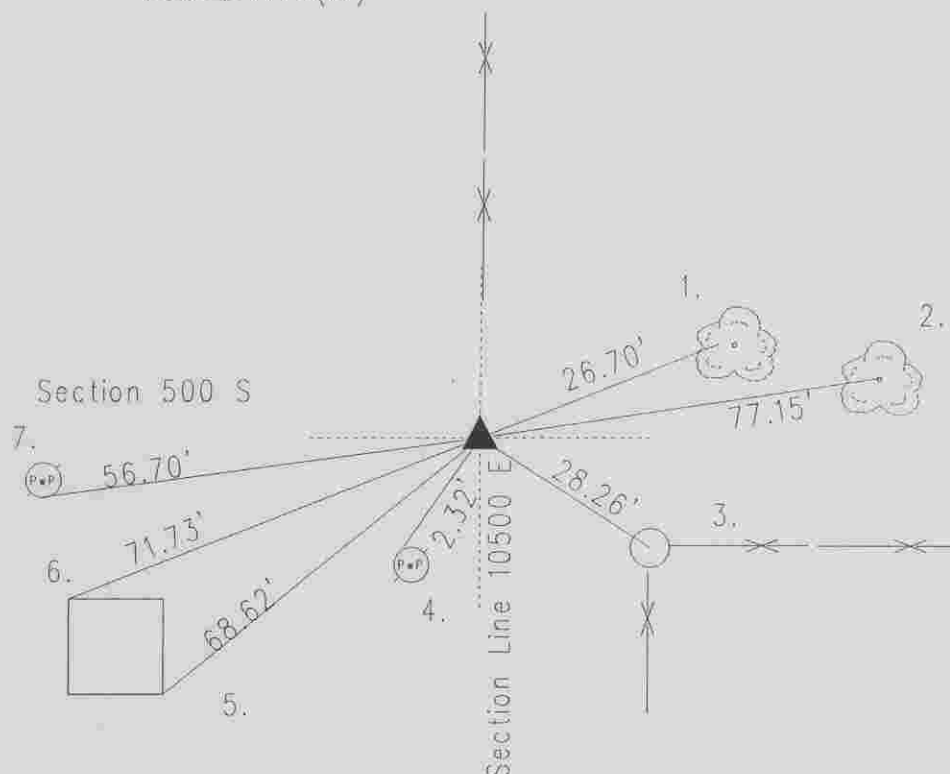


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 9 TOWNSHIP 15 RANGE 5
DATE: 2-23-05
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 1-25-99
IN. S.P.C. E ZONE NAD '83
NAME: 15050902
N: 502023.4389(m)
E: 73092.7178(m)

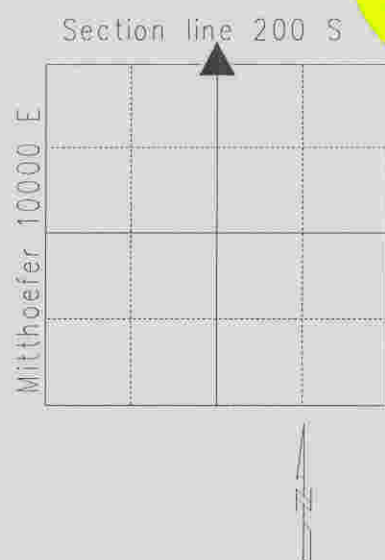

Original post set 1820 by Hendricks with witness: 8" lynn S 80 E 3 links; 14" dogwood N 76 W 18 links per Marion County Atlas pg. 14. Voorhis 8-28-1852 called witness: 30" ash N 22 W 59 links, 9" oak S 11 1/2 W 102 links per Warren Township Legal Survey Book pg. 49. Hiselman MCSO 12-4-75 called stone with high point 2" above the ground. Gries 6-8-88 called same. Wilcoxon 5-19-94 excavated and set Harrison. Re-tied 1-25-99 by Wilcoxon. Re-tied 2-23-05 by Wilcoxon.

15050902

REF.	DISTANCE	DESCRIPTION
1.	26.70'	Railroad spike S 24" walnut 8" up
2.	77.15'	Railroad spike S 24" walnut
3.	28.26'	Face of steel corner fence post
4.	2.32'	PK nail w/washer NW PwP no# 12" up
5.	68.62'	Cut 'x' in bolt SF leg of high tension tower
6.	71.73'	Cut 'x' in bolt NW leg of high tension tower
7.	56.70'	PK nail SF PwP#64-551 C 72" up